Revised
B- Jan. 1978
C- Jan. 1980
D- Oct. 1983
E- May, 1986
F- Sept., 1987
G- Aug., 1991

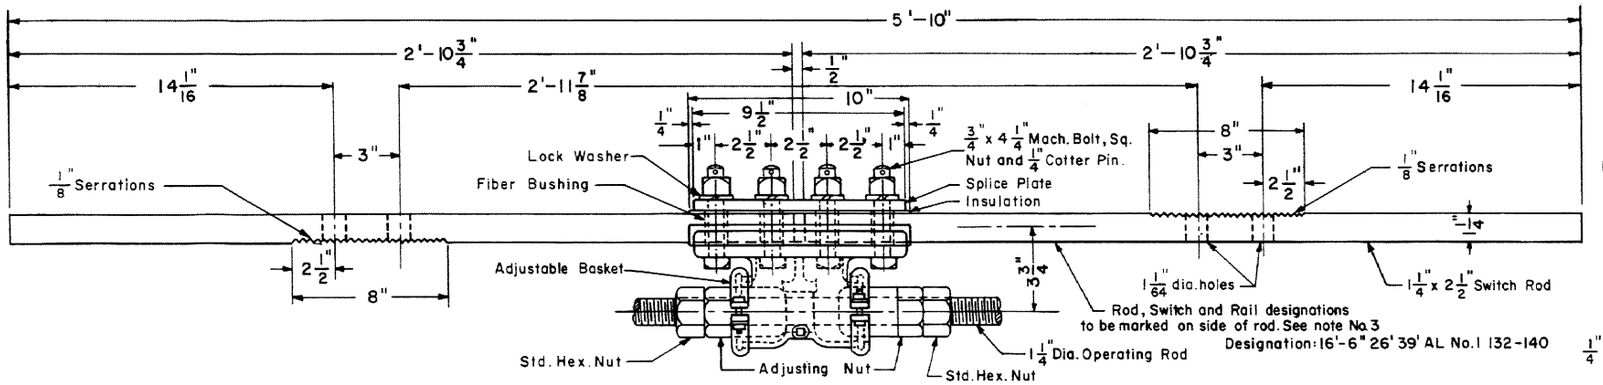

INSULATED SWITCH ROD NO. 1 WITH ADJUSTABLE BASKET



ADJUSTING NUT

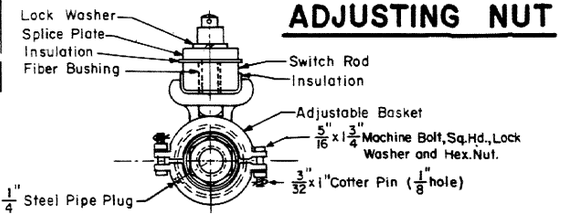

END VIEW

ROD NO.	X	B
2	3'-0 11/32"	4 53/64"
3	3'-2 1/8"	3 15/16"

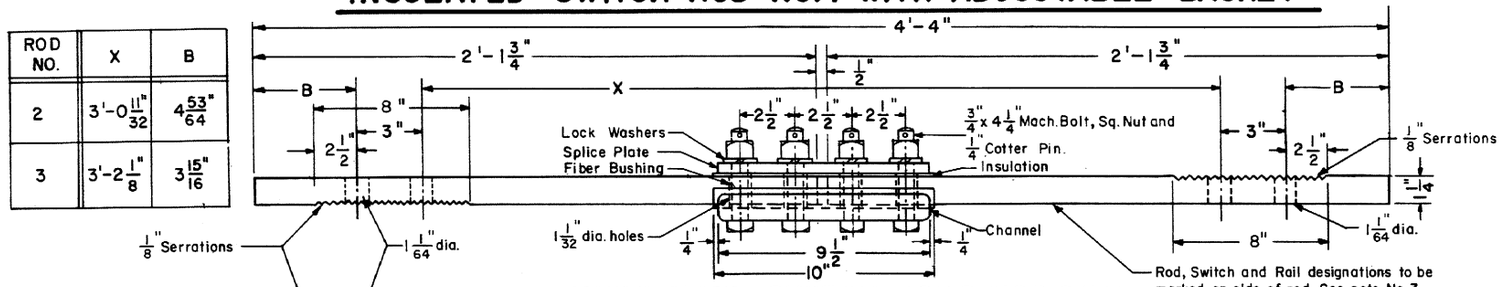

INSULATED SWITCH RODS-NOS. 2 & 3*

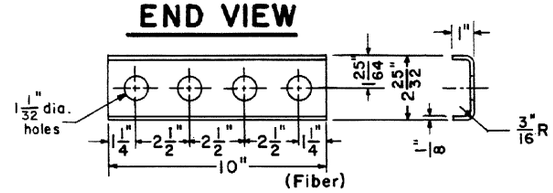

INSULATION FOR CHANNEL

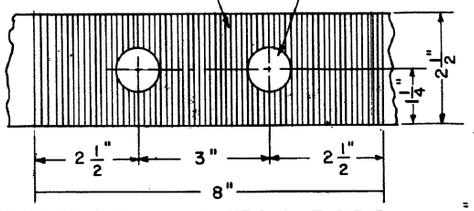

ELEVATION—SWITCH RODS

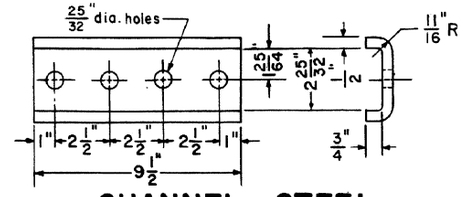

CHANNEL—STEEL



FIBER BUSHING

(SEE NOTE NO. 4)

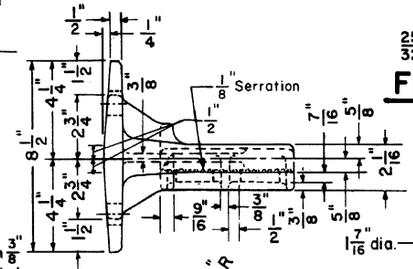

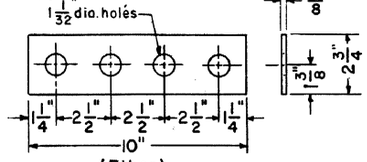

INSULATION PLATE FOR SPLICE PLATE

NOTES

1— All switch rods shall conform to current A.R.E.A. Specifications.

2— All fiber parts shall conform to current A.A.R. Signal Section Manual, Part 58, Specifications 13 - Hard Fiber.

3— Each switch rod shall be marked with deeply cut characters, not less than 1/2" high, with rod, switch and rail designations.

* 4— No. 3 switch rod is only required on switches for welded turnouts

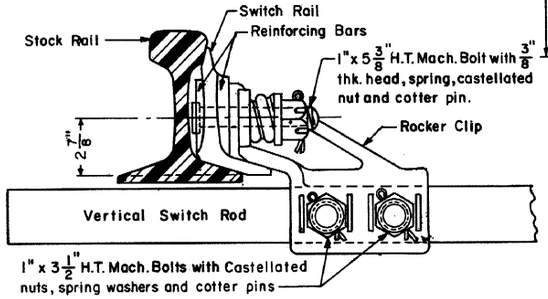

ASSEMBLED ROCKER CLIP

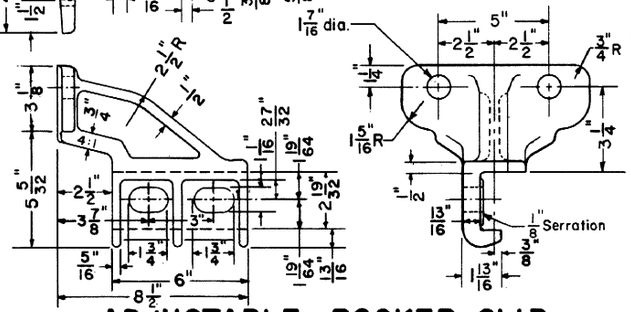

ADJUSTABLE ROCKER CLIP

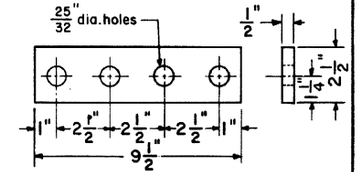

SPLICE PLATE

CONRAIL

73518-G

STANDARD

VERTICAL SWITCH RODS AND ADJUSTABLE ROCKER CLIPS

FOR 16'-6" SWITCH-UNDERCUT 132 R.E or 140 R.E RAIL

NOVEMBER, 1976

R H Smith
Chief Engineer—Maintenance of Way

A. R. Gordon
Chief Engineering Officer