Revisions:
"B"-Oct., 1983




## PLAN

PADLOCK PEDESTAL LATCH
(OPTIONAL-2 Required 01-458023)




SIDE ELEVATION

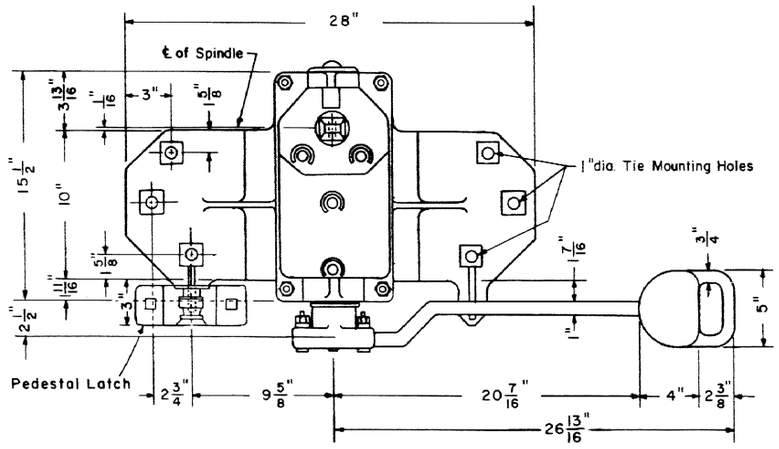


## ELEVATION




Forged Steel

## OPERATING ROD

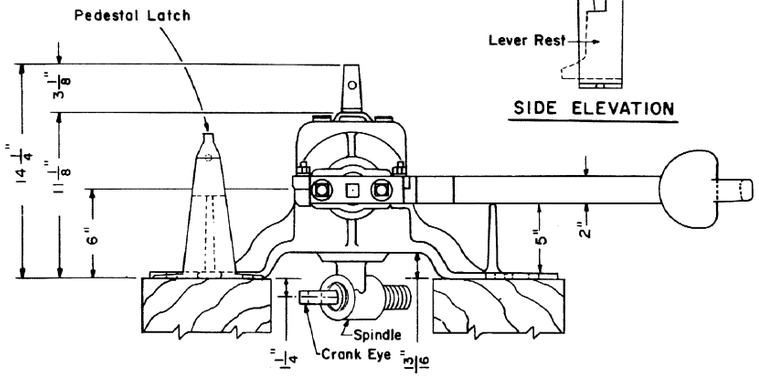


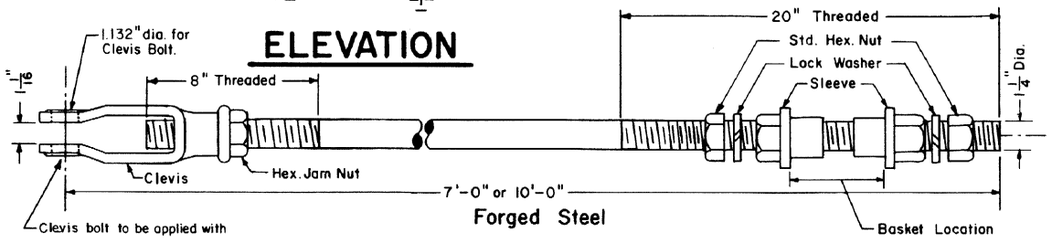


Forged

## SPINDLE




Heat Treated
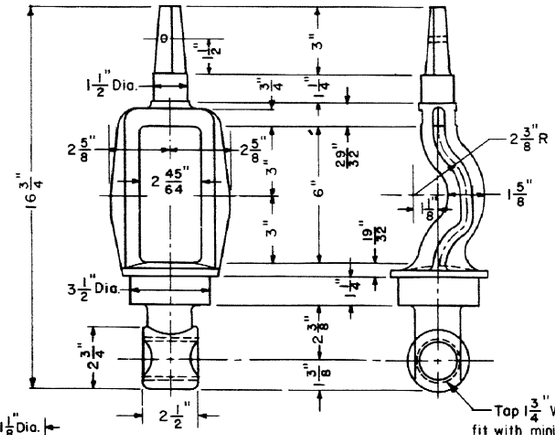
## CLEVIS BOLT




Forged

## CRANK EYE




## TOP OF SPINDLE DETAIL

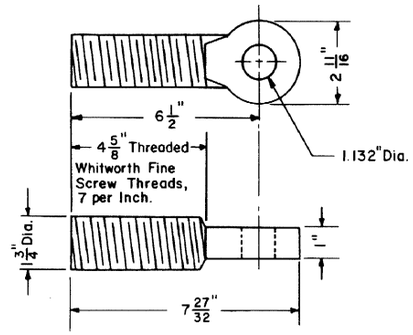


| TRACK CENTERS | | "X" MINIMUM DISTANCE (Gage Line of Near Rail to ℄ of Spindle) |
|---|---|---|
| FROM | LESS THAN | |
| 12'-2" | 13'-0" | 3'-8¾" |
| 13'-0" or More | | 4'-1" |

**NOTE**

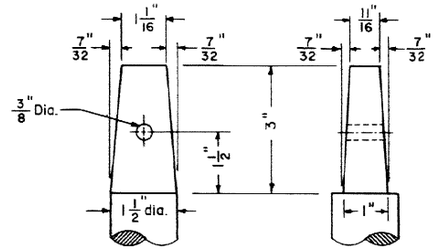For all switch stands, when not located between tracks, the "X" distance shall be a minimum of 4'-1" for Low Masts and 7'-0" for Intermediates.

## SWITCH STAND LOCATION

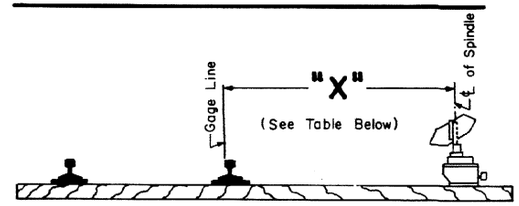CONRAIL

73902-B

STANDARD

# AUTOMATIC SWITCH STAND MODEL-22

R H Smith
Chief Engineer - Maintenance of Way

NOVEMBER 1976

Chief Engineering Officer