


REGION SIGN


With all lettering centered and a minimum of 1 1/2" on each end of sign, length must be in even inches with a minimum of 30".

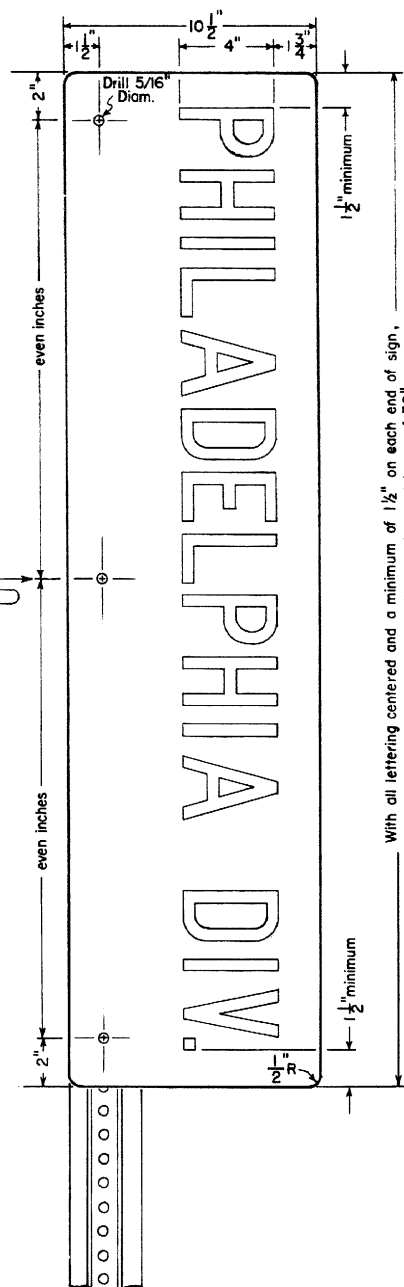


DIVISION SIGN

With all lettering centered and a minimum of 1 1/2" on each end of sign, length must be in even inches with a minimum of 30".

As close as possible to center

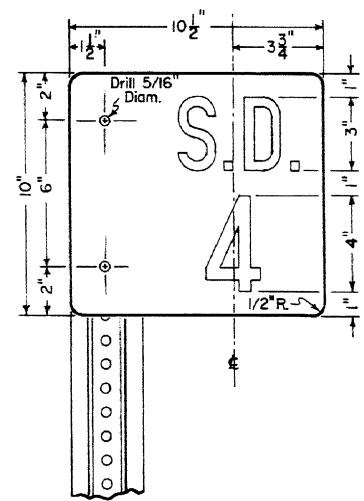

SUB-DIVISION SIGN

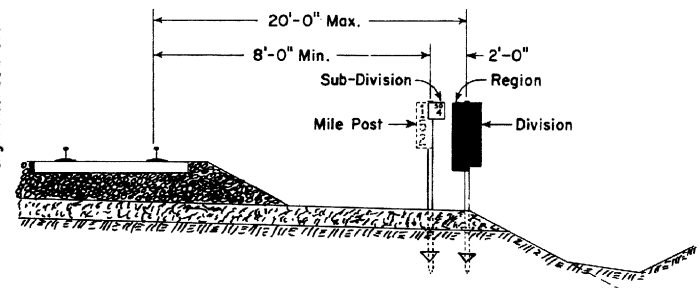

TYPICAL LOCATION OF SIGNS

NOTES

Letters and numerals, in condensed form, as per Standard Plan 78010-().

Signs shall be mounted and located on 9'-6" post with anchor plate in accordance with Plan 78480-().

Signs shall be made of .081" - 6061-T6 Aluminum sheet.

The faces of Region and Division signs shall be covered with No. 605 Black Scotchlac with No. 2870 Wide Angle Silver Flat-Top Scotchlite letters, or equivalent.

Both faces of Sub-Division sign shall be covered with No. 2870 Wide Angle Silver Flat-Top Scotchlite with No. 605 Black Scotchlac letters, or equivalent.

Signs shall be made at Sign Shop in Canton, Ohio or by an outside manufacturer in accordance with specifications.

Requisitions must be accompanied by a sketch of sign desired showing lettering wanted and location of holes required for attachment to post.

Region, Division and Sub-Division signs shall be located on the right hand side of railroad going North and West. Signs should be placed as near as possible to the field side of the roadbed shoulder not less than 8'-0" nor more than 20'-0" from gauge of nearest rail.

Signs shall face the territory to which they refer.

Region and Division signs shall be made so that tops of letters are away from track.

Where applicable Region sign will be mounted on same post with Division sign. Region sign shall project from the post toward the track.

Where Sub-Division is at same location as Mile Post sign it shall be mounted on same post with Mile Post sign projecting toward the track and Sub-Division sign toward the field.

Region sign and/or Division sign shall be located in same perpendicular line from track on field side of Sub-Division sign. The sign posts shall be 2'-0" apart.

In locations where Standard Sign Post cannot be used, Chief Regional Engineer shall approve manner of mounting signs.

CONRAIL **78440-B**

STANDARD

**REGION, DIVISION & SUB-DIVISION
SIGNS**

SEPTEMBER, 1978

R.H. Smith
Chief Engineer - Maintenance of Way
A.C. Gordon
Chief Engineering Officer