
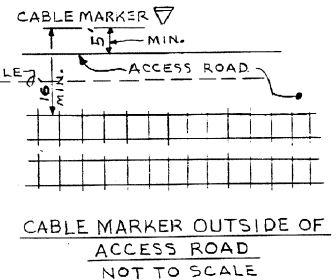
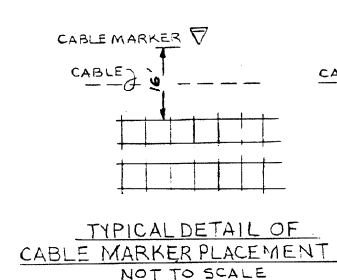
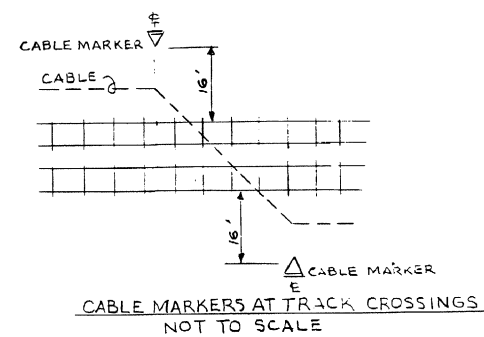
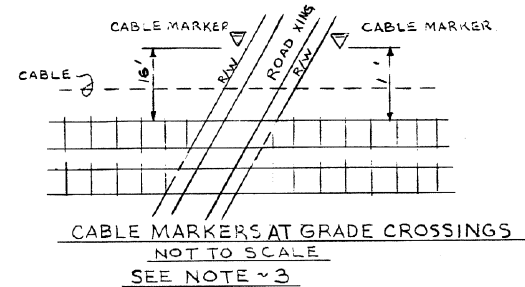


- 1-MARKERS WILL BE PLACED PARALLEL TO THE TRACK AT LEAST 18'-0" FROM GAGE OF NEAREST RAIL OR AT LEAST 5'-0" OUTSIDE ACCESS ROADS.
- 2-MARKERS WILL BE PLACED 3'-0" FROM SPLICE BOX LOCATIONS PROVIDED 16'-0" FROM RAIL IS MAINTAINED.
- 3-MARKERS WILL BE PLACED ON BOTH SIDES OF HIGHWAY CROSSINGS ON CONRAIL PROPERTY.
- 4 MAINTENANCE AND OR REPLACEMENT OF CABLE MARKERS WILL BE DONE BY THE APPROPRIATE TELEPHONE COMPANY
- 5-IN AREAS WHERE TWO OR MORE COMPANIES PLACE FIBER OPTIC THE MARKER SIGNS WILL BE ADJACENT TO EACH OTHER.
- 6-MARKERS WILL BE PLACED AT INTERVALS OF 1,500' ALONG RIGHT-OF-WAY.
- 7-ANY DEVIATION FROM STANDARD WILL BE CLEARED THROUGH CHIEF ENGINEER, DESIGN AND CONSTRUCTION.

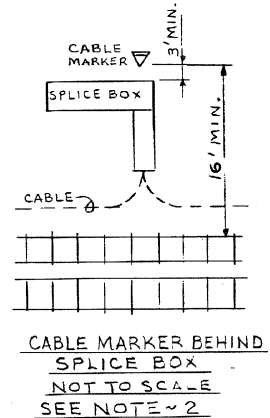

SEE NOTE ~1 RELATING TO THESE DETAILS

78600-A

CONRAIL

STANDARD

FIBER OPTIC CABLE MARKER PLACEMENT

APRIL, 1986

J.R. Coak
CHIEF ENGINEER - MAINTENANCE OF WAY
AGT Gordon
CHIEF ENGINEERING OFFICER