



**DERAIL CONNECTING RODS**

- 8002-91, COMPL., With screw jaw. With 8002-111, S=1-7/8
- 8002-92, ROD ONLY, Less screw jaw. With 8002-111, S=1-7/8
- 8002-93, COMPL., With screw jaw. With 8002-112, S=1
- 8002-94, ROD ONLY, Less screw jaw. With 8002-112, S=1
- 8002-95, COMPL., With screw jaw. With 8002-113, S=0
- 8002-96, ROD ONLY, Less screw jaw. With 8002-113, S=0

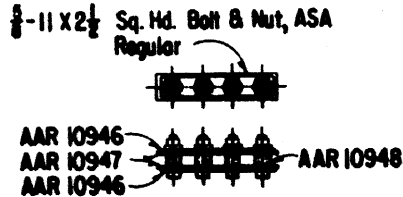


**8002-110, SPLICE COMPL. INSULATED**

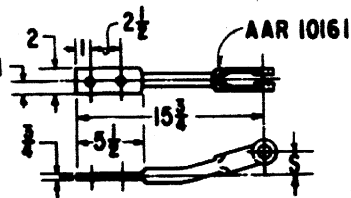


**SOLID JAW, SPLICE END**

- 8002-111, S=1-7/8
- 8002-112, S=1
- 8002-113, S=0

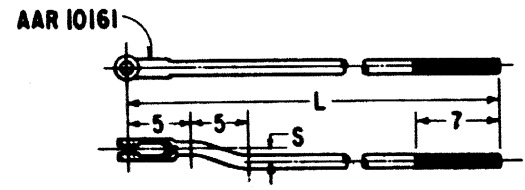


**SOLID JAW RODS, THREADED**

- 8002-141, L=29-1/2 S=0
- 8002-142, L=31 S=0
- 8002-143, L=21-1/4 S=0
- 8002-144, L=26-1/4 S=1-1/8

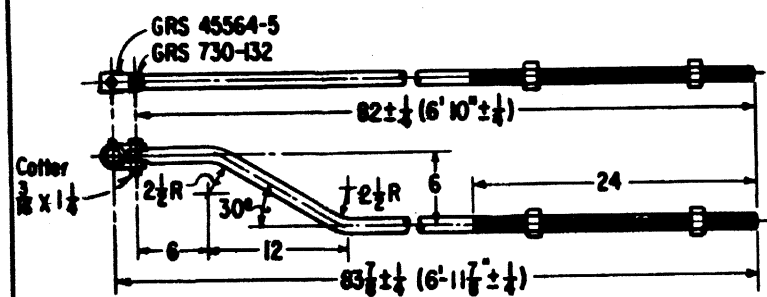


- 8002-101, THROW ROD COMPL., With Jaw and Pin
- 8002-102, THROW ROD ONLY, Less Jaw and Pin

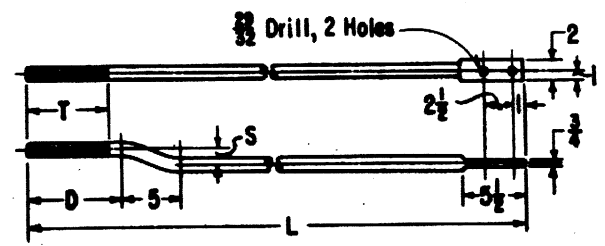


**SPLICE END RODS, THREADED**


- 8002-121, L=56-5/8 S=2-1/8 T=7 D=8
- 8002-122, L=59-7/8 S=2-1/8 T=7 D=8
- 8002-123, L=46-1/2 S=1-1/4 T=7 D=8
- 8002-124, L=78 S=0 T=26 D=0

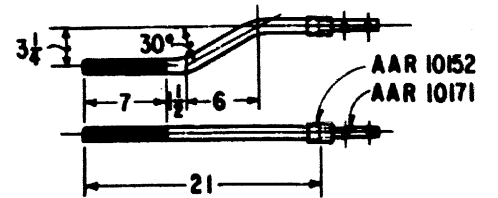

**8002-151, TANG END ROD, THREADED**

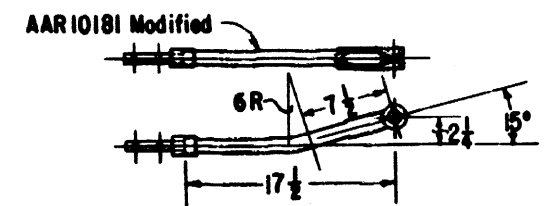

**8002-161, SOLID JAW ROD, TANG END**

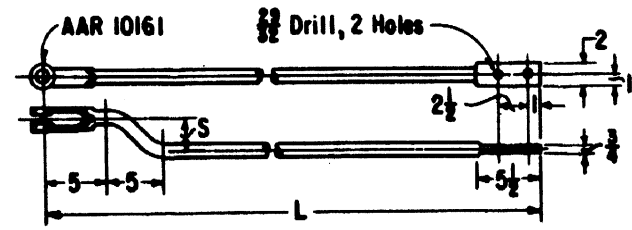

**SOLID JAW ROD, SPLICE END**


- 8002-131, L=51-3/8 S=2-1/8
- 8002-132, L=58 S=2-3/4

0 12 24 36  
All dimensions given in inches.

See Notes on Sheet 1.

SEE NOTES ON SHEET 1

SHEET 2  
CONT'D ON SH 3

**CONRAIL**  **CS-8002**

STANDARD  
RODS  
FOR SWITCH LAYOUTS

AUG. 6, 1976