
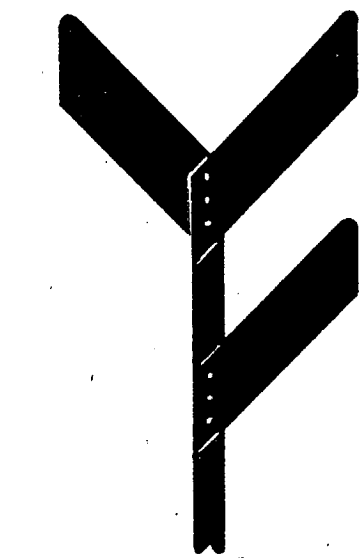


Issue	Date
1	11-23-34

EC
J-II
CBS

Recommended by:
N.Y.C. LINES -
ENGINEERING -
COMMITTEE.
C. B. Bronson
W. S. Burnett
H. W. Fenno
R. P. Forsberg
O. Gersbach
G. H. Harris
G. A. Kirley
R. L. Latham
L. G. Murphy
W. A. Murray
J. W. Pfau
R. O. Rote
Dr. H. von Schrenk
C. C. Warne
J. V. NEUBERT
Chairman.

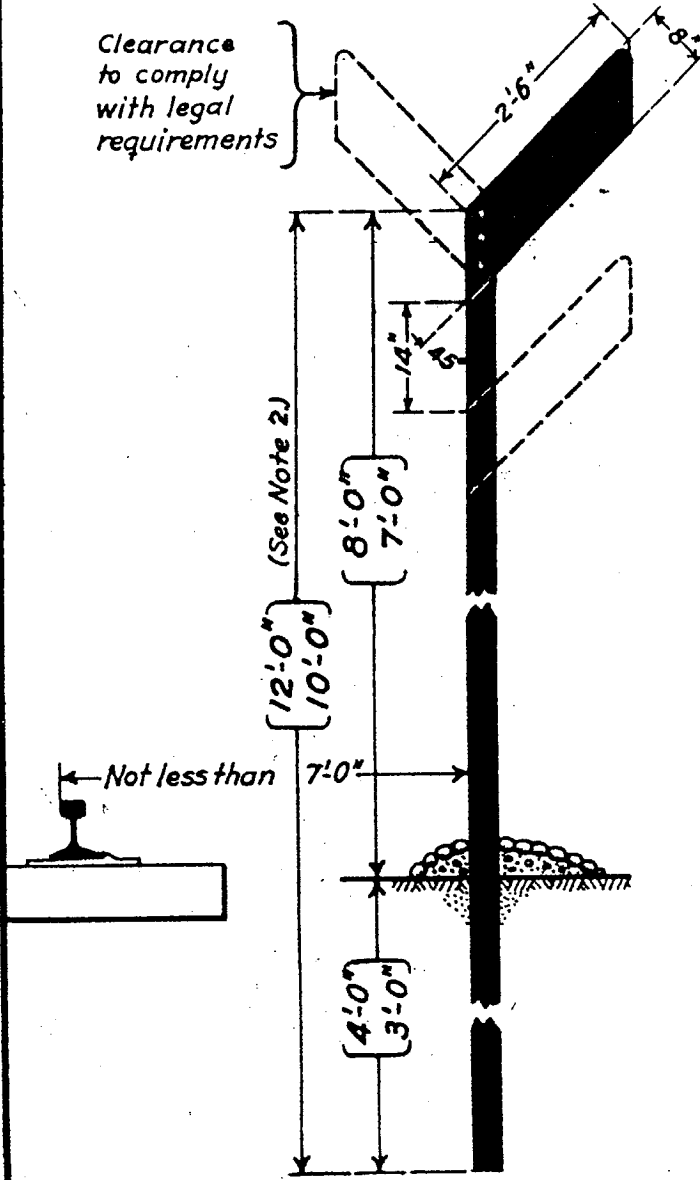

WING PLOW AND FLANGER
WARNING



WING PLOW



FLANGER

GENERAL NOTES:

1. POSTS may be made of scrap rail, boiler tube, angle iron "T" iron or any other suitable or desirable material.
2. LENGTH of posts may vary from 10 ft. to 12 ft. depending on local condition and distance set in ground.
3. BLADES in flanger sign may be made of $\frac{3}{16}$ " metal plates. Blades to be fastened to post with $\frac{3}{8}$ " screws or rivets.
4. PAINTING: - Post and blade to be painted black on all sides.
5. LOCATION: - Place sign at right angles to track not less than 7'-0" from gage of rail and not less than 60'-0" from objective.

NEW YORK CENTRAL LINES
STANDARD
FLANGER SIGNS
FOR SNOW EQUIPMENT

R. E. Murphy
VICE PRESIDENT