


OPERATING		LEVER CONTROL				AUTOMATK	FIXED
		NON-AUTOMATIC		SEMI-AUTOMATIC			
		MECH.	POWER				
UPPER QUADRANT	0°-45°						
	0°-90°						
	0°-45°-90°						
	0°						

COLOR	LEVER CONTROL			FIXED
	NON-AUTOMATIC	SEMI-AUTOMATIC	AUTOMATIC	
RED AND YELLOW				
RED AND GREEN				
RED, YELLOW AND GREEN				
RED				

POSITION OR EQUIVALENT	NON-AUTOMATIC	SEMI-AUTOMATIC		AUTOMATIC	SPECIAL REQUIREMENTS REFER TO NOTES	FIXED
		STICK	NON-STICK			
0°-45°						
0°-90°						
0°-45°-90°						
0° OR 45°						

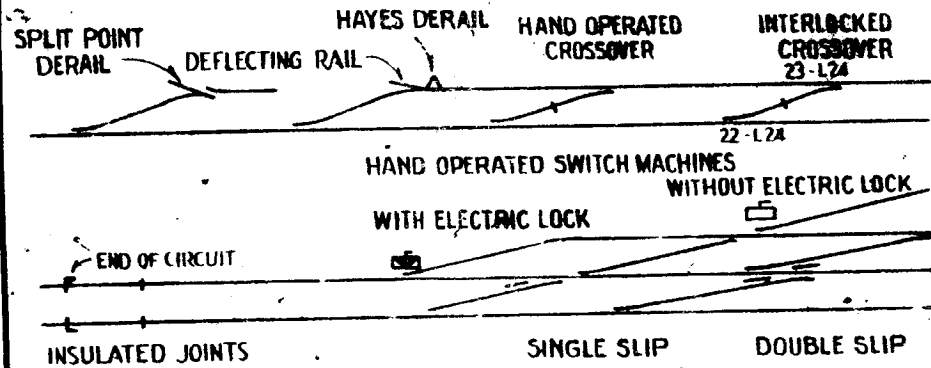

- SL THREE POSITION, AUTOMATIC SEARCHLIGHT SIGNAL.
- E THREE POSITION, SEMI-AUTOMATIC SEMAPHORE.
- M TWO POSITION, NON-AUTOMATIC MECHANICAL.
- NON-OPERATIVE SIGNAL.
- O MARKER LIGHT.

- CROSSING GATES
- FLASHING LIGHTS
- AUTOMATIC GATES AND FLASHING LIGHTS
- CROSSING BELL

NOTES:

- E - ELECTRIC SEARCHLIGHT
- SL - SEARCHLIGHT
- CP - CROSSING POSITION LIGHT
- A - (REFER TO ABOVE)

Y. E. SIGNAL SYSTEM