| NO | ITEM | REQ | REF ACCT NO |
|---|---|---|---|
| 1 | CLAMP | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

NOTES:

1. Prepare desired lengths of 500,000 C.M. bare stranded copper cable, and solder a clamp to each end.

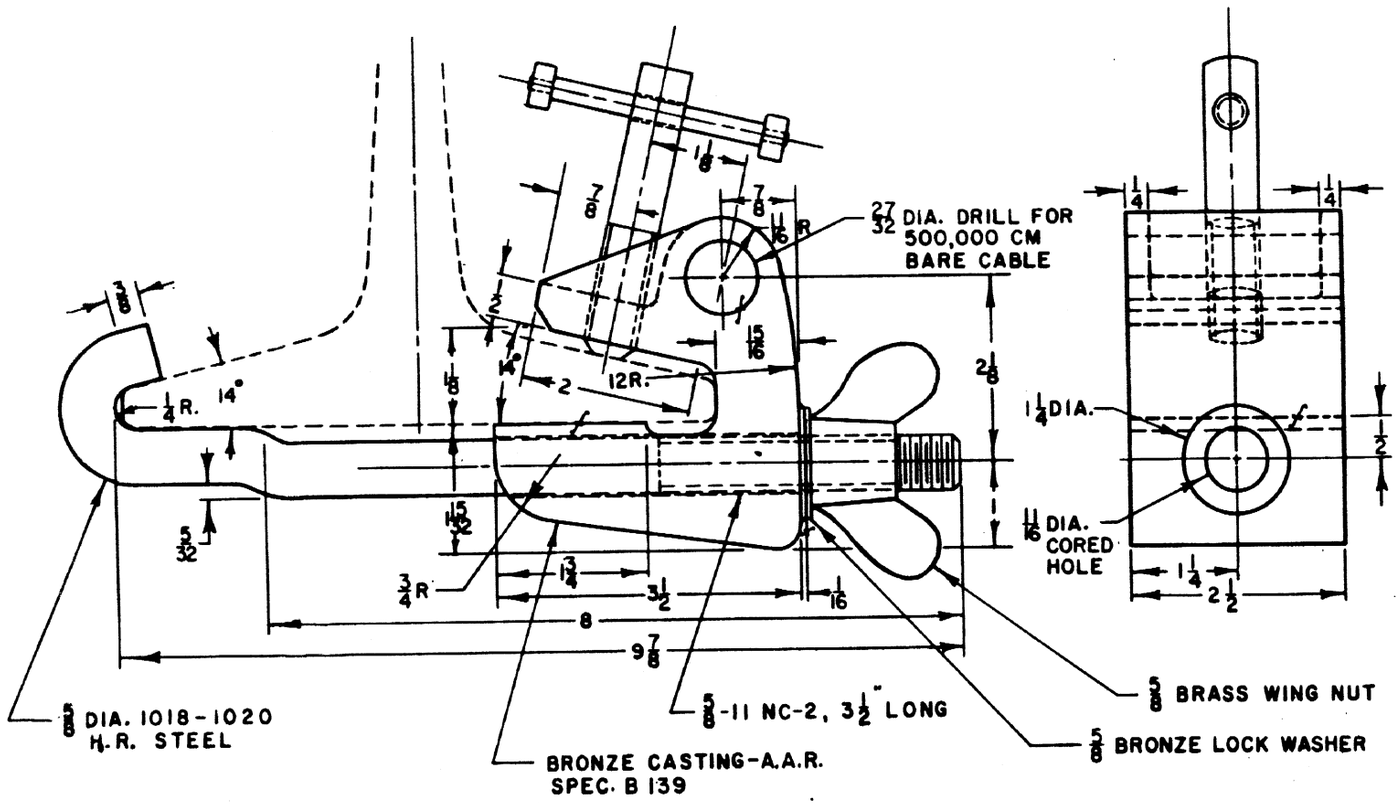


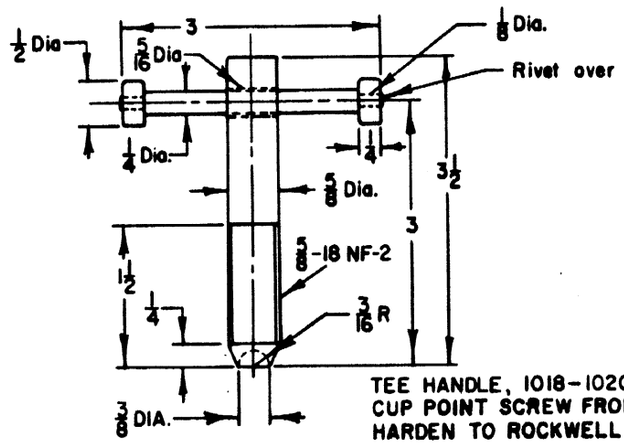


TEE HANDLE, 1018-1020 H.R. STEEL. CUP POINT SCREW FROM DRILL ROD, HARDEN TO ROCKWELL C 52-55.

SHEET 1

CONRAIL

CS-2010

STANDARD

# CLAMP

FOR TEMPORARY RAIL BONDS
FOR A.C. AND D.C. RUNNING RAILS

JAN 19,1983

Approved H. Alexander
Chief Engineer C&S

Printed in USA